


PS Poly-Twill™

Create a beautiful, rich look with our Pressure Sensitive Poly-TWILL™. Backed with a “peel and stick” adhesive, which allows easy positioning of appliques for sewing with out tacking (heat application). Our exclusive PSA2 Needle Glide™ Adhesive helps prevent gummed up needles and broken threads. Available in 43cm x 25m rolls.



STAHL'S

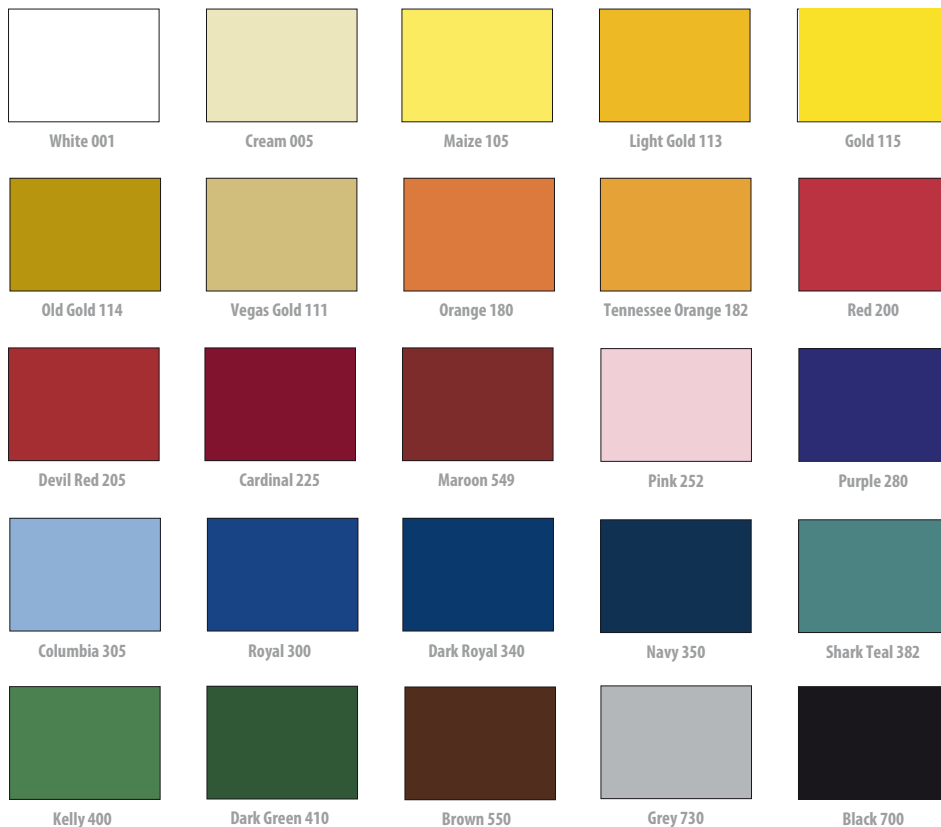

Please note: Due to variations in the photographic and printing process, colors shown in this brochure may vary from the actual product. It is advisable to refer to a product sample before making your purchase. We reserve the right to change the specification of these products without prior notification.



Recommended Fabrics

100% cotton
100% polyester*
Poly/cotton blends
Woven Nylon / Nylon knits
Acrylic blends
Satin
Cordura®
Fleece

Cutting Notes

You should always test cut prior to any production run. Remember cutter settings will need to be adjusted as your blade ages. For optimal cutting and weeding, maintain a line thickness of at least 5 mm (3/16") for lettering & logos.

Application Instruction

Temp: 165°C
Time: 10 seconds
Pressure: Light
(#2-4 on Hotronix®)

Multi-Color Designs

Apply background for 3-5 seconds, peel carrier cold. Repeat for additional colors. Finish with final application of 18-20 seconds.

Care Instructions

Machine wash up to 40°C using mild detergent. Do not use bleach. Dry at a normal dryer setting on household machines. Can be dry cleaned. Can be directly ironed onto.

Storage

Store in a cool, dry area. Avoid direct heat, sunlight and humidity.

Accessories Required

Craft Paper or reusable Cover Sheet, EZ Weeder®

* Always test before manufacture.



KEY

