




THIN TEXTILE FILM FOR PRINTING ON NYLON FABRICS.

PVC-free, very thin textile printing film, with a slightly sticky backer carrier. Easy to use, and multi colored prints can be created. Manufactured with a special adhesive for application to nylon.

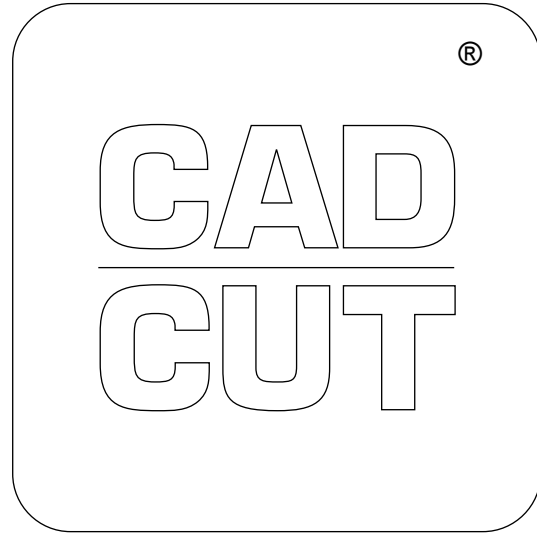

AVAILABLE IN

50 cm x 25 m rolls

RECOMMENDED FABRICS

- 100% cotton
- 100% polyester*
- Polyester-cotton blends

* Test before application!

CUTTING NOTES

You should always test cut prior to any production run. Remember cutter settings will need to be adjusted as the blade ages. For optimal cutting and weeding, maintain a line thickness of at least 1.5 mm (1/16") for lettering and logos.

APPLICATION INSTRUCTIONS

- Temperature: 150° C
- Time: 10 sec.
- Pressure: light
- (#2-3 on Hotronix®)
- Peel: cold

MULTI-COLOR DESIGNS

Apply background for 3-5 seconds, peel carrier cold. Repeat for additional colors. Finish with final application of 18-20 seconds. Peel cold.

ACCESSORIES RECOMMENDED

- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®

CARE INSTRUCTIONS

Machine wash up to 30° C using mild detergent. Do not use bleach. Dry at normal dryer settings on household machines. Do not dry-clean. Do not iron directly onto CAD-CUT® Nylon (use cover sheet).

STORAGE

Store in cool, dry area. Avoid direct heat, sunlight and humidity.


DETAILS




KEY

Easy weed	Thin
Ironable	Sticky carrier
Ironable only inside out	Multi-color application
Washable	Peel hot
Sublimation	Application
Stretchable	
Flock	


CAD-CUT® PREMIUM PLUS NYLON



001
white



100
lemon
ca. Pant. 7405c



110
yellow
ca. Pant. 012c




180
orange
ca. Pant. 021c



200
red
ca. Pant. 186c



270
burgundy
ca. Pant. 188c



320
light blue
ca. Pant. 298c



300
royal blue
ca. Pant. 286c




350
navy
ca. Pant. 532c



400
green
ca. Pant. 7727c



730
grey
ca. Pant. 7543c



700
black



815
silver
ca. Pant. 877c



115
gold
ca. Pant. 871c



241
neon pink



250
fuchsia
ca. Pant. 2425c