




## PLOTTABLE THERMAL ADHESIVE FOR HEAT TRANSFER FOILS

CAD-CUT® Adhesive is a plottable heat activated adhesive which is needed for applying heat transfer foils. Cut the desired design as you would cut a regular flex film, apply adhesive to textile, cover design with heat transfer foil (color side facing up) and press. That's how easy it is to produce beautiful and shiny foil-embellished designs.

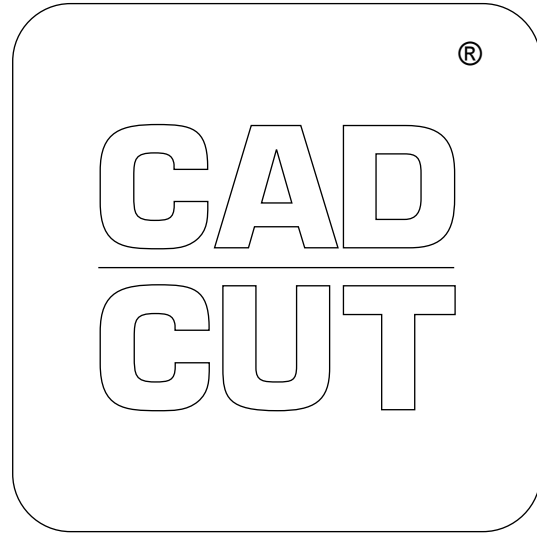

## AVAILABLE IN

30 cm x 9,1 m rolls

## RECOMMENDED FABRICS

- 100% Cotton
- 100% Polyester
- Polyester-Cotton blends
- Polyester blends

## CUTTING NOTES

You should always test cut prior to any production run. Remember cutter settings will need to be adjusted as the blade ages. For optimal cutting and weeding, maintain a line thickness of at least 1.5 mm for lettering and logos.

## APPLICATION INSTRUCTIONS

- Temperature: 150° C
- Time: 10 sec.
- Pressure: Light-Medium (#2-6 on Hotronix®)
- Peel: Hot

## MULTI-COLOR DESIGNS

No overprinting of motifs covered with Heat Transfer Foil possible.

## ACCESSORIES RECOMMENDED

- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®, LED Weeder. LED Pin or Tweezers

## CARE INSTRUCTIONS

Machine wash up to 30° C using mild detergent. Do not use bleach. Do not dry clean. Can be directly ironed.


## STORAGE

Store in cool, dry area. Avoid direct heat, sunlight and humidity.

## DETAILS



## KEY

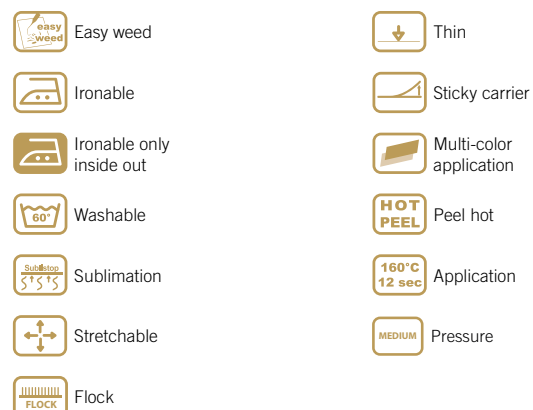

# CAD-CUT® ADHESIVE



Adhesive