



SMOOTH AND MATTE PU MATERIAL THAT PROVIDES OPTIMAL OPACITY

There is no back-adhesive carrier which makes it perfect for large designs, numbers and letters as the film is so easy to weed. Low cost - very easy to process (no need for capitalizing).



AVAILABLE IN

50 cm x 25 m rolls

RECOMMENDED FABRICS

- 100% Cotton
- 100% Polyester*
- Polyester-Cotton blends

* Test before application!

CUTTING NOTES

You should always test cut prior to any production run. Remember cutter settings will need to be adjusted as the blade ages. For optimal cutting and weeding, maintain a line thickness of at least 1.5 mm for lettering and logos.

APPLICATION INSTRUCTIONS


- Temperature: 160° C
- Time: 10 sec.
- Pressure: Medium (#4-6 on Hotronix®)
- Peel: Cold

MULTI-COLOR DESIGNS

Apply background for 3-5 seconds, peel carrier cold. Repeat for additional colors. Finish with final application of 18-20 seconds. Peel cold.

ACCESSORIES RECOMMENDED

- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®, LED Weeder. LED Pin or Tweezers

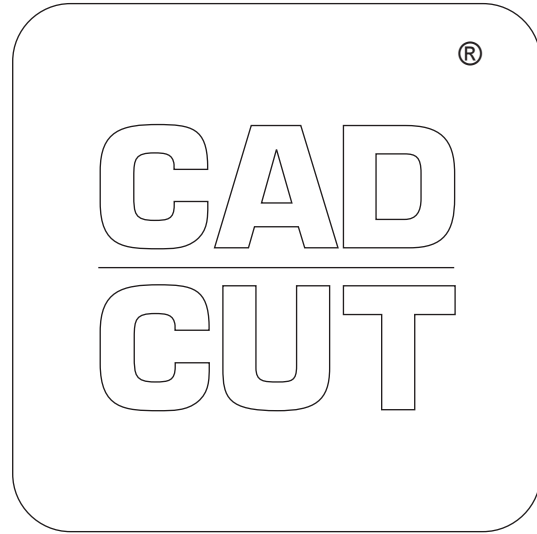

CARE INSTRUCTIONS

Machine wash up to 60° C using mild detergent. Do not use bleach. Do not dry clean. Iron inside out only.

STORAGE

Store in cool, dry area. Avoid direct heat, sunlight and humidity.


DETAILS




KEY

Easy weed	Thin
Ironable	Sticky carrier
Ironable only inside out	Multi-color application
Washable	Peel hot
Sublimation	Application
Stretchable	Pressure
Flock	

CAD-CUT® BASIC FILM



001
white




110
yellow
ca. Pant. 012c



200
red
ca. Pant. 186c



300
royal blue
ca. Pant. 286c




350
navy
ca. Pant. 532c



400
green
ca. Pant. 7727c



700
black



815
silver
ca. Pant. 877c



115
gold
ca. Pant. 871c