

CAD-CUT® BASIC FILM



SMOOTH AND MATTE PU MATERIAL THAT PROVIDES OPTIMAL OPACITY

There is no back-adhesive carrier which makes it perfect for large designs, numbers and letters as the film is so easy to weed.

Low cost - very easy to process (no need for capitalizing).



AVAILABLE IN

50 cm x 25 m roll

RECOMMENDED FABRICS * Test before application!

- 100 % Cotton
- 100 % Polyester*
- Cotton-Polyester blends

CUTTING NOTES

Always test the cutting settings before production. Remember that the settings depend on the age of the blade used. To ensure optimum processing of the material, a **minimum line thickness of 1.5 mm** is required.

APPLICATION INSTRUCTIONS


Temperature: 160° C
Time: 10 sec.
Pressure: Medium (#4-6 with Hottronix®)
Carrier: Cold peel

MULTI-COLOR DESIGNS

Print the background for 3-5 seconds, peel off the carrier cold. Repeat the process for each additional color. Print the last color for 18 - 20 seconds. Remove the carrier cold.

ACCESSORIES RECOMMENDED

- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®, LED Weeder, LED Pin or Tweezers

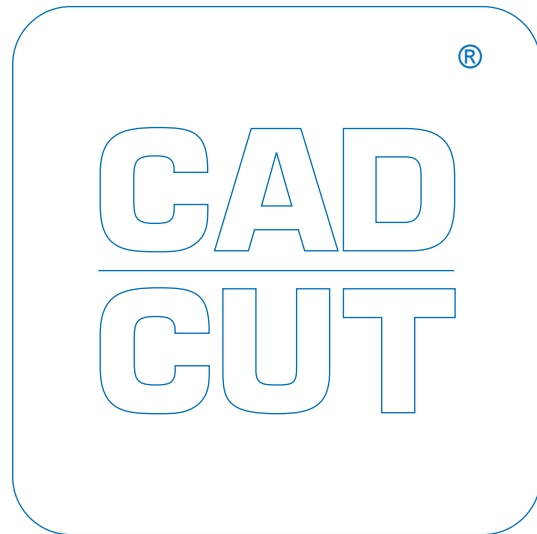


CARE INSTRUCTIONS


Washable up to 60° C. Please do not use fabric softener or bleach. Wash inside out and iron.

STORAGE


Store in a cool, dry environment. Avoid direct heat or sunlight.

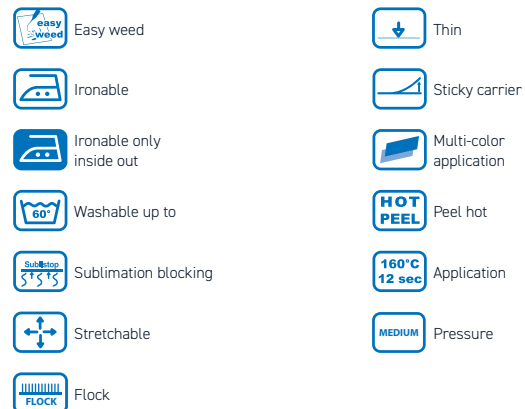

CAD-CUT® BASIC FILM



001
white




110
yellow
ca. Pant. 012c



200
red
ca. Pant. 186c



300
royal blue
ca. Pant. 286c




350
navy
ca. Pant. 532c



400
green
ca. Pant. 7727c



700
black



815
silver
ca. Pant. 877c



115
gold
ca. Pant. 871c