

# CAD-CUT® SILICONE 200



## EINZIGARTIGES SILIKON-MATERIAL MIT BLOCK-OUT EIGENSCHAFT.

A 0.2 mm thick silicone film with a matte surface and soft feel. Due to its blocking properties, this material is ideal for printing on sublimated polyester. With Silicone 200, even finer details can be cut without any problems.



## AVAILABLE IN

50 cm x 25 m roll

## RECOMMENDED FABRICS \* Test before application!

- 100 % Cotton
- Cotton-Polyester blends
- 100 % Polyester\*
- Sublimation dyed polyester

## CUTTING NOTES

Always test the cutting settings before production. The settings depend on the age of the blade used. To ensure optimum processing of the material. **Minimum line thickness of 1,5 mm.**

## APPLICATION INSTRUCTIONS


Temperature: 150° C  
Time: 10 sec. Repressing: 5 sec.  
Pressure: Medium (#4-6 with Hotronix®)  
Carrier: Cold peel

## MULTI-COLOR DESIGNS

CAD-CUT® Silicone is not suitable for multi-layer applications.

## ACCESSORIES RECOMMENDED

- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®, LED Weeder. LED Pin or Tweezers

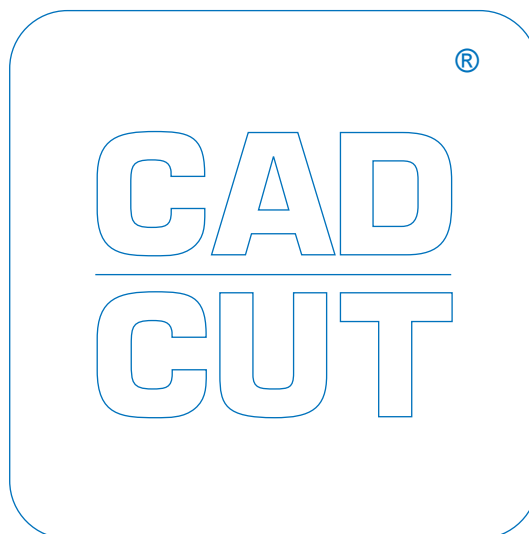

## CARE INSTRUCTIONS

Washable up to 60 degrees. Please check the washability of the fabric. Suitable for tumble drying on a gentle cycle. Not suitable for dry cleaning. Wash and iron inside out. We strongly advise against using liquid detergent, bleach, fabric softener, and laundry pods due to the aggressive ingredients that attack the film.

## STORAGE

Store in a cool, dry environment. Avoid direct heat or sunlight.



Easy weed



Ironable



Ironable only inside out



Washable up to



Sublimation blocking



Stretchable



Flock



Thin



Sticky carrier



Multi-color application



Peel hot




Application



Pressure

# CAD-CUT® SILICONE 200



**001**  
white



**200**  
red  
ca. Pant. 186c



**320**  
light blue  
ca. Pant. 2148c



**300**  
royal blue  
ca. Pant. 286c



**730**  
grey  
ca. Pant. 422c



**400**  
green  
ca. Pant. 7727c



**700**  
black