CAD-CUT® BASIC FILM

SMOOTH AND MATTE PU MATERIAL THAT PROVIDES OPTIMAL OPACITY

There is no back-adhesive carrier which makes it perfect for large designs, numbers and letters as the film is so easy to weed.
Low cost - very easy to process (no need for capitalizing).

OEKO TEX® STANDARD 100

AVAILABLE IN

50 cm x 25 m roll

RECOMMENDED FABRICS   * Test before application!

- 100 % Cotton
- 100 % Polyester*
- Cotton-Polyester blends

CARE INSTRUCTIONS

Washable up to 60 degrees. Please check the washability of the fabric. Not suitable for dry cleaning or tumble drying. Wash and iron inside out. We strongly advise against using liquid detergent, bleach, fabric softener, and laundry pods due to the aggressive ingredients that attack the foil.

CUTTING NOTES

Always test the cutting settings before production. Remember that the settings depend on the age of the blade used. To ensure optimum processing of the material, a **minimum line thickness of 1.5 mm is required.**
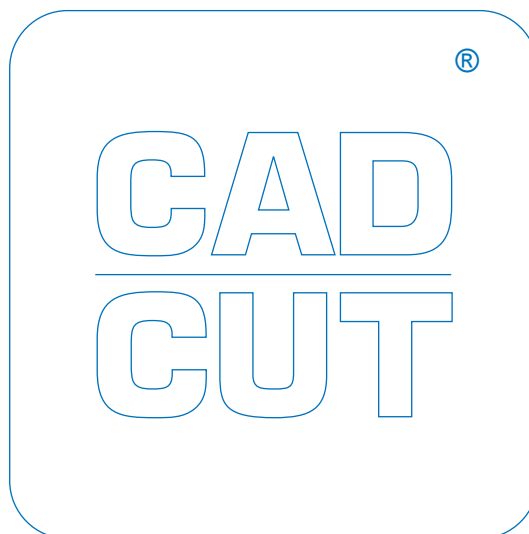
STORAGE

Store in a cool, dry environment. Avoid direct heat or sunlight.

APPLICATION INSTRUCTIONS

Temperature:	160° C
Time:	10 sec.
Pressure:	Medium (#4-6 with Hotronix®)
Carrier:	Cold peel

MULTI-COLOR DESIGNS

Print the background for 3-5 seconds, peel off the carrier cold. Repeat the process for each additional color. Print the last color for 18 - 20 seconds. Remove the carrier cold.

ACCESSORIES RECOMMENDED

- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®, LED Weeder, LED Pin or Tweezers

|			
Easy weed		Thin	
Ironable		Sticky carrier	
Ironable only inside out		Multi-color application	
Washable up to		Peel hot	
Sublimation blocking		Application	
Stretchable		Pressure	
Flock			

CAD-CUT® BASIC FILM

001 white

110 yellow
ca. Pant. 012c

200 red
ca. Pant. 186c

300 royal blue
ca. Pant. 286c

350 navy
ca. Pant. 532c

400 green
ca. Pant. 7727c

700 black

815 silver
ca. Pant. 877c

115 gold
ca. Pant. 871c

STAHLS' EUROPE

Almost all materials can be combined with each other and are suited for a variety of fabrics.
For further information please consult the product details online.

1225