










100% POLYESTER ON A TRANSPARENT CARRIER.

The material is easily reversible so that it can be positioned on the textile for later re-embroidery without the need for any additional aids. The specially developed PSA2 Needle Glide™ adhesive allows a motif to be positioned on the textile without sticking the needles or causing thread breakage during the embroidery process. 100% polyester on a transparent backing and therefore ideal for plotting.

ATTENTION: To avoid fraying of the fabric during washing, the edges must be sealed, either by overprinting with another CAD-CUT® material or by embroidering around them.



AVAILABLE IN

· 42 cm x 22,5 m rolls

RECOMMENDED FABRICS * Must be tested before proofing!

· 100 % Cotton · Cotton-Polyester blends

· 100% Polyester* · 100 % Nylon

· Sublimation dyed polyester · Nylon blended fabric

CUTTING NOTES

Always test the cutting settings before production. The settings depend on the age of the blade used. To ensure optimum processing of the material. Minimum line thickness of 5 mm.

CARE INSTRUCTIONS

Washable up to 40 degrees. Please check the washability of the fabric. Suitable for tumble drying on a gentle cycle. Not suitable for dry cleaning. Wash and iron inside out. We strongly advise against using liquid detergent, bleach, fabric softener, and laundry pods due to the aggressive ingredients that attack the film.

STORAGE

Store in a cool, dry environment. Avoid direct heat or sunlight.

APPLICATION INSTRUCTIONS

Temperature: 165° C Time: 10 sec.

Medium (#4-6 with Hotronix®) Pressure:

The design should then be embroidered.

MULTI-COLOR DESIGNS

Cover the first color design with a cover sheet and press on for 3 - 5 seconds. Repeat process for further colors. Press on the last color for 18 - 20 seconds.

ACCESSORIES RECOMMENDED

- · Grip Cover Sheet
- · Cover Sheet Non-Sticky
- EZ Weeder®, LED Weeder, LED Pin or Tweezers











Stretchable


















CAD-CUT® PS POLY-TWILL™

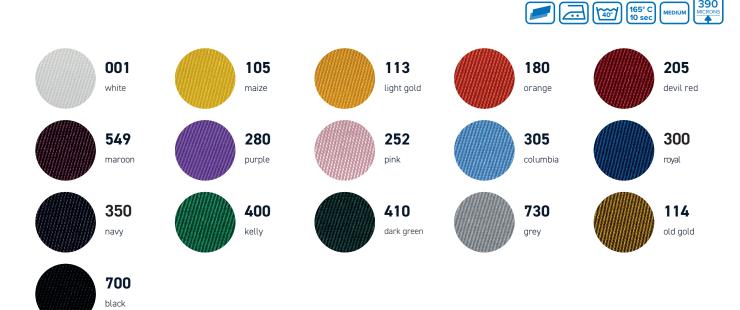



390 MICPONS