


CAD-CUT® PREMIUM PLUS SUBLISTOP



FLEX FILM WITH BLOCK-OUT FUNCTION FOR SUBLIMATION-DYED POLYESTER TEXTILES.

Polyurethane (PU) flex film with sublimation barrier layer and optimum opacity. Especially for printing on functional clothing and softshell jackets. Easy cutting and weeding. Suitable for multi-colored prints.

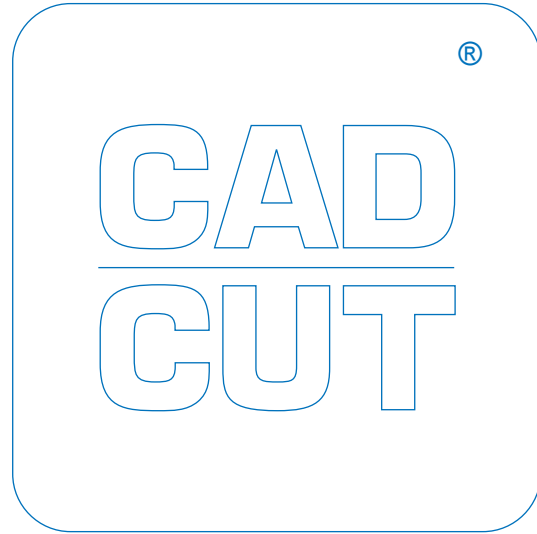

AVAILABLE IN

- 50 cm x 25 m roll

RECOMMENDED FABRICS * Test before application!

- 100 % Cotton*
- Cotton-Polyester blends*
- 100 % Polyester
- Sublimation dyed polyester

CUTTING NOTES

Always test the cutting settings before production. The settings depend on the age of the blade used. To ensure optimum processing of the material. **Minimum line thickness of 2.5 mm.**

APPLICATION INSTRUCTIONS

Temperature: 130° C
Time: 10 sec.
Pressure: Medium (#4-6 with Hotronix®)
Carrier: Cold peel

MULTI-COLOR DESIGNS

Print the background for 3 - 5 seconds, peel off the carrier cold. Repeat the process for each additional color. Print the last color for 18 - 20 seconds. Peel off the carrier hot.

ACCESSORIES RECOMMENDED


- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®, LED Weeder, LED Pin or Tweezers

CARE INSTRUCTIONS


Washable up to 40° C. Please do not use fabric softener or bleach. Do not use fabric softener or bleach. Can be ironed directly, do not dry clean.

STORAGE


Store in a cool, dry environment. Avoid direct heat or sunlight.

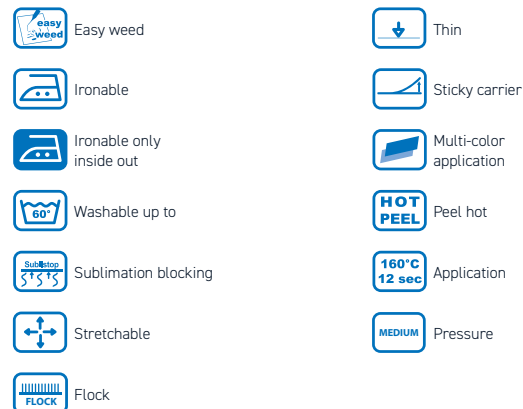

CAD-CUT® PREMIUM PLUS SUBLISTOP



001
white



005
cream
ca. Pant. 479c



110
yellow
ca. Pant. 012c



185
light orange
ca. Pant. 1495c



200
red
ca. Pant. 186c



320
light blue
ca. Pant. 298c




380
turquoise
ca. Pant. 7717c



422
light green
ca. Pant. 362c



730
grey
ca. Pant. 7543c



815
silver
ca. Pant. 877c



115
gold
ca. Pant. 871c