




INCREASE VISIBILITY IN LOW-LIGHT CONDITIONS, DIN 20471 CERTIFIED.

Reflective heat transfer material is thin, economical with a reflective finish. This material has a no-tack backing and is easy to cut and weed.

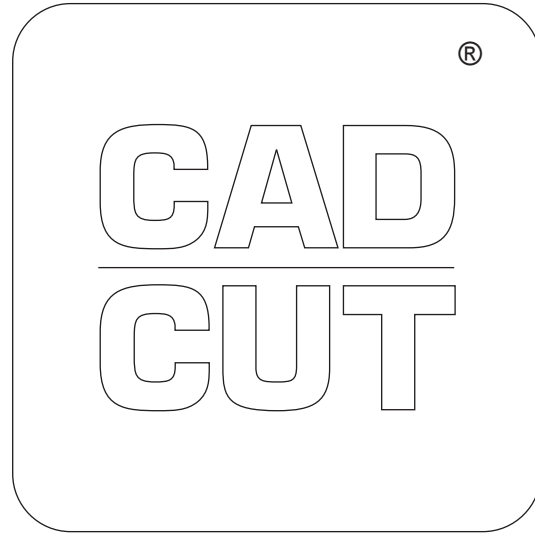

## AVAILABLE IN

50 cm x 25 m rolls

## RECOMMENDED FABRICS

- 100% cotton
- 100% polyester\*
- Polyester-cotton blends

\* Test before application!

## CUTTING NOTES

You should always test cut prior to any production run. Remember cutter settings will need to be adjusted as the blade ages. For optimal cutting and weeding, maintain a line thickness of at least 2 mm (1/12") for lettering and logos.

## APPLICATION INSTRUCTIONS

- Temperature: 150°C
- Time: 5 sec. Repressing 5 sek.
- Pressure: medium
- (#4-6 on Hotronix®)
- Peel: hot

## MULTI-COLOUR DESIGNS

CAD-CUD® Reflective is not suitable for multi-layer application.

## ACCESSORIES RECOMMENDED

- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®

## CARE INSTRUCTIONS

Machine wash up to 40° C using mild detergent. Do not use bleach. Dry at normal dryer settings on household machines. Do not dry-clean. Can be directly ironed.













## STORAGE


Store in cool, dry area. Avoid direct heat, sunlight and humidity.

## DETAILS



## KEY

 Easy weed	 Thin
 Ironable	 Sticky carrier
 Ironable only inside out	 Multi-colour application
 Washable	 Peel hot
 Sublimation	 Application
 Stretchable	
 Flock	



silver reflective