

CAD-CUT® SOFT METALLIC



SOFT METALLIC HEAT TRANSFER MATERIAL FEATURES A DISTINCT LUSTER AND SHINE

Creates a soft, metallised finish for textile decoration.
It is supplied on a self-adhesive polyester carrier



AVAILABLE IN

50 cm x 25 m roll

RECOMMENDED FABRICS * Test before application!

- 100 % Cotton
- Cotton-Polyester blends
- 100 % Polyester*
- Sublimation dyed polyester*

CUTTING NOTES

Test the cut before each production run. The blade settings must be adjusted if the blade is older. For optimum cutting and weeding: **Minimum line thickness of at least 1,5 mm (1/16 ")**.

APPLICATION INSTRUCTIONS


Temperature: 150° C
Time: 10 sec.
Pressure: Medium (#4-6 with Hotronix®)
Carrier: Cold peel

MULTI-COLOR DESIGNS

Press the background for 2 - 4 seconds - peel off the carrier warm / cold. Repeat this for additional colors. Press on the last color for 13 - 15 seconds. Remove the carrier cold.

ACCESSORIES RECOMMENDED

- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®, LED Weeder. LED Pin or Tweezers

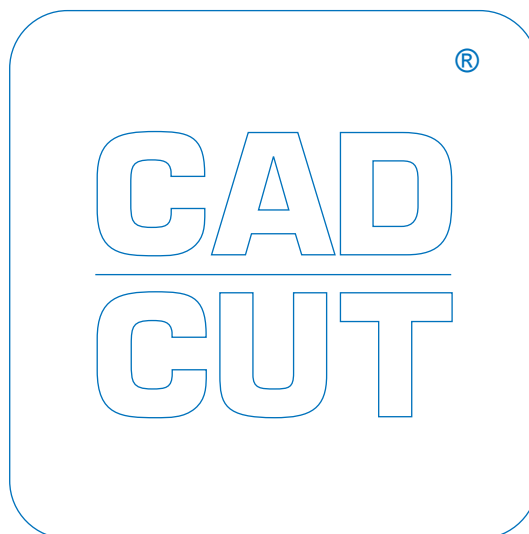

CARE INSTRUCTIONS

Washable up to 40° C. Please do not use fabric softener or bleach. Suitable for tumble drying on a gentle setting. Wash and iron inside out.

STORAGE

Store in a cool, dry environment. Avoid direct heat or sunlight.



Easy weed



Ironable



Ironable only
inside out



Washable up to
60°



Sublimation blocking



Stretchable



Flock



Thin



Sticky carrier



Multi-color
application



Peel hot



Application



Pressure

CAD-CUT® SOFT METALLIC



	5200 red		5201 holo red		5255 light pink		5252 rose pink		5250 hot pink
	5280 purple		5320 light blue		5350 navy		5321 light goldish blue		5400 kelly green
	5116 bronze		5550 brown		5815 silver		5115 gold		5700 black