

INCREASE VISIBILITY IN LOW-LIGHT CONDITIONS, DIN 20471 CERTIFIED.

Highly reflective flex film, ideal for applications in the security sector. Ideal for plotting larger motifs as the material has no adhesive backing. Available in the color silver.



AVAILABLE IN

- 50 cmx 25 m roll

RECOMMENDED FABRICS * Test before application!

- 100 % Cotton
- Cotton-Polyester blends
- 100 % Polyester*
- 100 % Nylon*
- Sublimation dyed polyester
- Nylon blended fabric*

CUTTING NOTES

IMPORTANT: Remove the protective backing before cutting and always test the cutting settings before production. The settings depend on the age of the blade used. To ensure optimum processing of the material. **Minimum line thickness of 3 mm.**

APPLICATION INSTRUCTIONS


Temperature: 150° C
 Time: 5 sec. Nachpressen: 5 sec.
 Pressure: Medium (#4-6 with Hotronix®)
 Carrier: hot peel

MULTI-COLOR DESIGNS

CAD-CUT® Reflective is not suitable for overprinting the films.

ACCESSORIES RECOMMENDED

- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®, LED Weeder, LED Pin or Tweezers

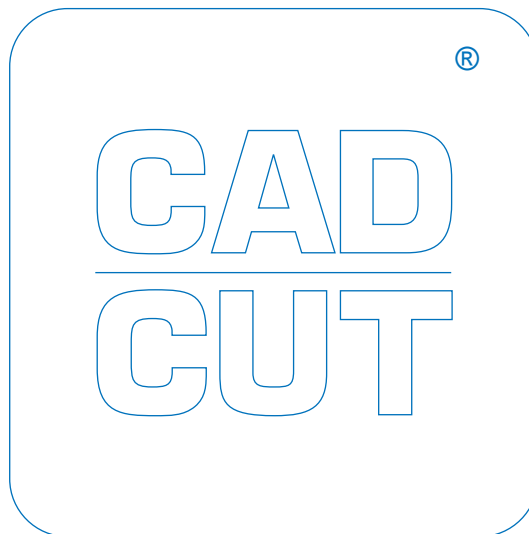


CARE INSTRUCTIONS

Washable up to 40 degrees. Please check the washability of the fabric. Not suitable for dry cleaning or tumble drying. Wash and iron inside out. We strongly advise against using liquid detergent, bleach, fabric softener, and laundry pods due to the aggressive ingredients that attack the foil.

STORAGE

Store in a cool, dry environment. Avoid direct heat or sunlight.



CAD-CUT® REFLECTIVE

DIN
20471

HOT
PEEL




40

150° C
10 sec

MEDIUM

140
MICRONS



silver reflective