

CAD-CUT® SILICONE 500



DURABLE SILICONE MATERIAL WITH A MATTE FINISH AND A SOFT TOUCH.

A 0.5 mm thick silicone film with a matt surface and soft feel. Enhance your textiles with this unique 3D look. Due to its blocking properties, this material is ideal for printing on sublimated polyester.



AVAILABLE IN

50 cm x 25 m roll

RECOMMENDED FABRICS * Test before application!

- 100 % Cotton
- Cotton-Polyester blends
- 100 % Polyester*
- Sublimation dyed polyester

CUTTING NOTES

Always test the cutting settings before production. The settings depend on the age of the blade used. To ensure optimum processing of the material. **Minimum line thickness of 2.5 mm.**

APPLICATION INSTRUCTIONS


Temperature: 150° C
Time: 10 sec. Repressing: 5 sec.
Pressure: Medium (#4-6 with Hotronix®)
Carrier: Cold peel

MULTI-COLOR DESIGNS

CAD-CUT® Silicone is not suitable for multi-layer applications.

ACCESSORIES RECOMMENDED

- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®, LED Weeder. LED Pin or Tweezers

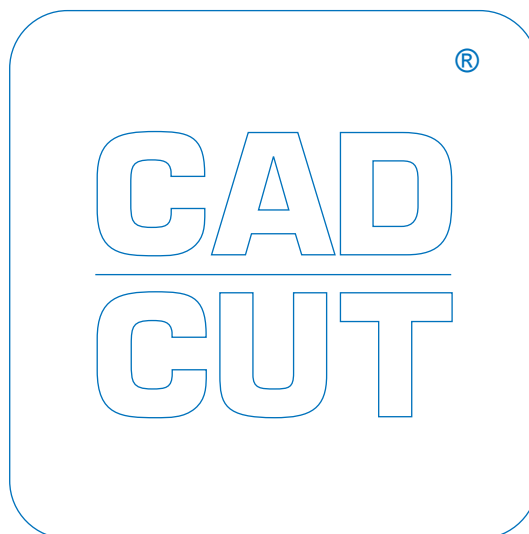

CARE INSTRUCTIONS

Washable up to 60 degrees. Please check the washability of the fabric. Not suitable for dry cleaning or tumble drying. Wash and iron inside out. We strongly advise against using liquid detergent, bleach, fabric softener, and laundry pods due to the aggressive ingredients that attack the foil.

STORAGE

Store in a cool, dry environment. Avoid direct heat or sunlight.



Easy weed



Ironable



Ironable only inside out



Washable up to



Sublimation blocking



Stretchable



Flock



Thin



Sticky carrier



Multi-color application



Peel hot




Application



Pressure


CAD-CUT® SILICONE 500



001
white



200
red
ca. Pant. 186c



320
light blue
ca. Pant. 2148c



300
royal blue
ca. Pant. 286c



730
grey
ca. Pant. 422c



400
green
ca. Pant. 7727c



700
black